# FY 16-17 Candidate Sidewalk Projects

POLK COUNTY

Sidewalk Advisory Committee

POLK COUNTY

Sidewalk Advisory Committee

# FY 16-17 Candidate Sidewalk Projects

While a sidewalk request may be limited to part of a roadway, the initial analysis will include a general evaluation of the greater corridor-area to document overall features. This inclusive assessment will determine what segments along the corridor are feasible for sidewalk construction and detail reasons where segment lengths are not currently recommended. If a school, park or community center is located within the corridor, the evaluation will consider additional sidewalks along connecting roads as potential project add-ons.

POLK COUNTY

Sidewalk Advisory Committee

# FY 16-17 Candidate Sidewalk Projects

February 2, 2016

**Lakeland / N. Lakeland**

West Daughtery Road (West of US98)

West Daughtery Road (East of US98)

East Daughtery Road

Odom Road

Campbell Road North

6,490 LF/1.23 MI (MOL)
Marcum Rd
700
St. Anthony Catholic School
McDonald's
Peace Ave
Edgar L. Padge Elementary Scho
W Daughtery Rd
W Daughtery Rd
W Daughtery Rd
Walmart Supercenter
N Daughtery Rd
Gibsonia-Galloway Rd
Gibsonia
98
N
West Daughtery Road
West of US98 to Gib-Galloway Road (Gibsonia)
POLK COUNTY

*Need to extend sidewalk on south side to US 98S*

**West Daughtery Road** (West of US98)

*Looking west at Walmart entrance on south side of road*

**West Daughtery Road** (West of US98)

*Hart Road looking east on south side of road*

**West Daughtery Road** (West of US98)

*Floy Road looking west on south side of road*

**West Daughtery Road** (West of US98)

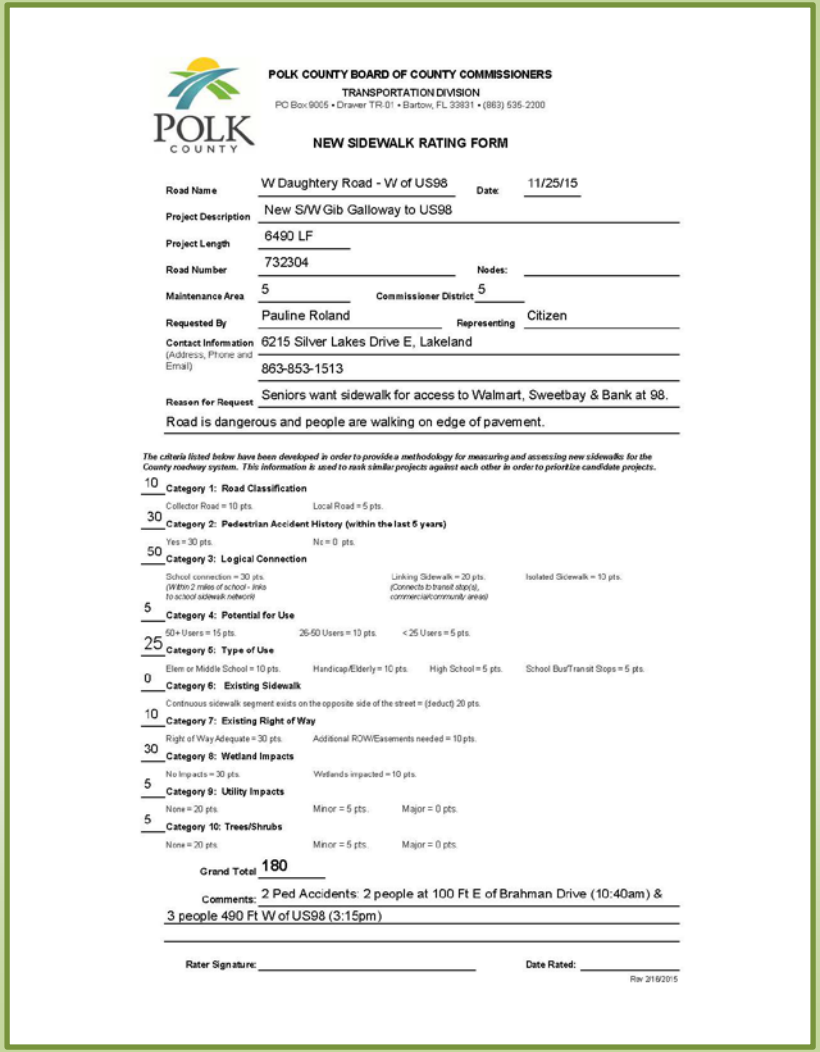

POLK COUNTY BOARD OF COUNTY COMMISSIONERS
TRANSPORTATION DIVISION
PO Box 9005 • Drawer TR-01 • Bartow, FL 33831 • (863) 535-2200

POLK COUNTY

NEW SIDEWALK RATING FORM

| | |
|---|---|
| Road Name | W Daughtery Road - W of US98 |
| Date | 11/25/15 |
| Project Description | New S/W Gib Galloway to US98 |
| Project Length | 6490 LF |
| Road Number | 732304 |
| Nodes | |
| Maintenance Area | 5 |
| Commissioner District | 5 |
| Requested By | Pauline Roland |
| Representing | Citizen |
| Contact Information (Address, Phone and Email) | 6215 Silver Lakes Drive E, Lakeland<br>863-853-1513 |
| Reason for Request | Seniors want sidewalk for access to Walmart, Sweetbay & Bank at 98.<br>Road is dangerous and people are walking on edge of pavement. |

*The criteria listed below have been developed in order to provide a methodology for measuring and assessing new sidewalks for the County roadway system. This information is used to rank similar projects against each other in order to prioritize candidate projects.*

10 **Category 1: Road Classification**
Collector Road = 10 pts. Local Road = 5 pts.

30 **Category 2: Pedestrian Accident History (within the last 5 years)**
Yes = 30 pts. No = 0 pts.

50 **Category 3: Logical Connection**
School connection = 30 pts. (Within 2 miles of school - links to school sidewalk network) Linking Sidewalk = 20 pts. (Connects to transit stop(s), commercial/community areas) Isolated Sidewalk = 10 pts.

5 **Category 4: Potential for Use**
50+ Users = 15 pts. 26-50 Users = 10 pts. < 25 Users = 5 pts.

25 **Category 5: Type of Use**
Elem or Middle School = 10 pts. Handicap/Elderly = 10 pts. High School = 5 pts. School Bus/Transit Stops = 5 pts.

0 **Category 6: Existing Sidewalk**
Continuous sidewalk segment exists on the opposite side of the street = (deduct) 20 pts.

10 **Category 7: Existing Right of Way**
Right of Way Adequate = 30 pts. Additional ROW/Easements needed = 10 pts.

30 **Category 8: Wetland Impacts**
No Impacts = 30 pts. Wetlands impacted = 10 pts.

5 **Category 9: Utility Impacts**
None = 20 pts. Minor = 5 pts. Major = 0 pts.

5 **Category 10: Trees/Shrubs**
None = 20 pts. Minor = 5 pts. Major = 0 pts.

Grand Total 180

Comments: 2 Ped Accidents: 2 people at 100 Ft E of Brahman Drive (10:40am) & 3 people 490 Ft W of US98 (3:15pm)

Rater Signature: _____ Date Rated: _____

Rev 3/16/2015

# West Daughtery Road (West of US 98)

**Total Score:** 155
**Limits:** US 98S west to Gib-Galloway Rd.
**Length:** 6,490 LF (MOL)
**Requester:** Private Citizen

**Comments:**

- Seniors want sidewalk for safe pedestrian access to businesses at US 98
- Users are walking on edge of pavement
- Two pedestrian accidents involving five people
  - 100 LF east of E. Brahman Drive at 10:40 am (2 people on 12/10/10)
  - 490 LF west of US 98 at 3:15 pm (3 people on 4/4/12)

Marcum Rd
700
St. Anthony Catholic School
Pearce Ave
McDonald's
5,596 LF/1.06 MI (MOL)
Edgar L. Padge Elementary Scho
W Daughtery Rd
Walmart Supercenter
N Daughtery Rd
Gibsonia-Galloway Rd
Gibsonia
98
N
West Daughtery Road
East of US98 to N. Daughtery Road (Gibsonia)
POLK COUNTY

*End of sidewalk at Amscot (rear parking) east of US 98N*

**West Daughtery Road** (East of US98)

*Looking Northeast at Norton Road*

**West Daughtery Road** (East of US98)

*Crafton Drive to Lake Breeze Avenue – Sidewalk on south side*

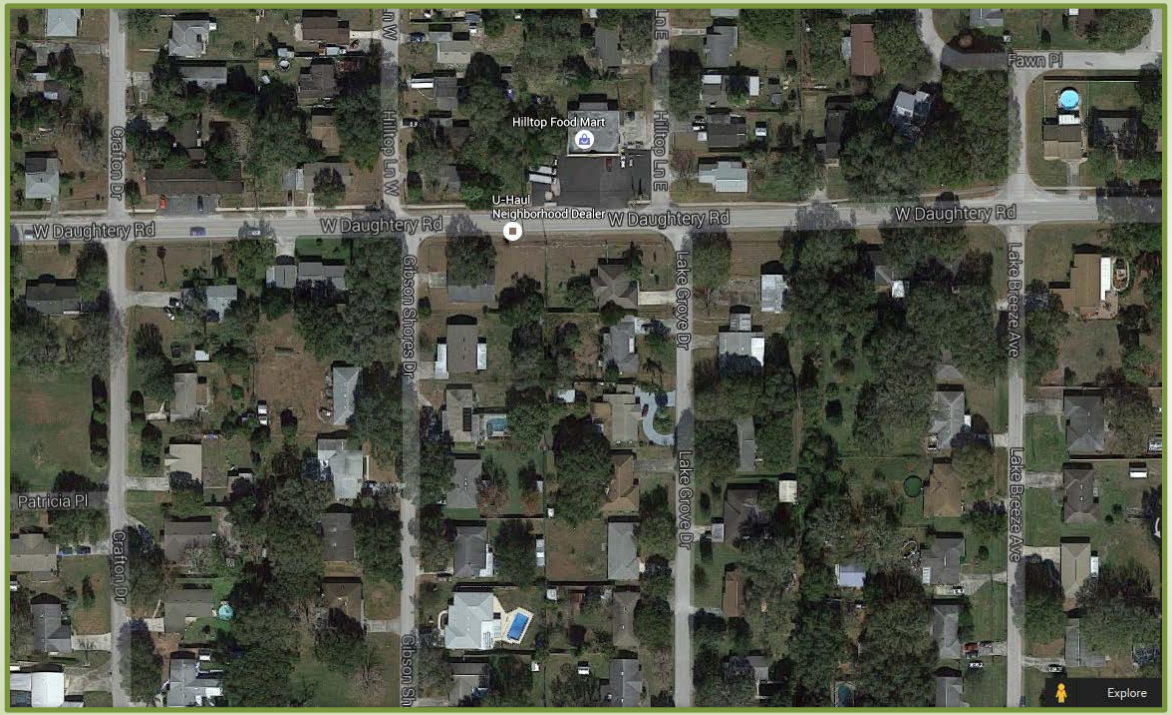


**West Daughtery Road** (East of US98)

# *New Sidewalk – Driftwood Drive to Bambi Drive*

**West Daughtery Road** (East of US98)

*Looking at SE corner of Leelon and Pierce Intersection*

**West Daughtery Road** (East of US98)

*SE corner of intersection - New sidewalk on east side of N. Daughtery Road (Leelon Road to Shannon Drive)*

**West Daughtery Road** (East of US98)

*South side of Leelon Road*
*Sidewalk from Odom Lane to Odom Road*

**West Daughtery Road** (East of US98)

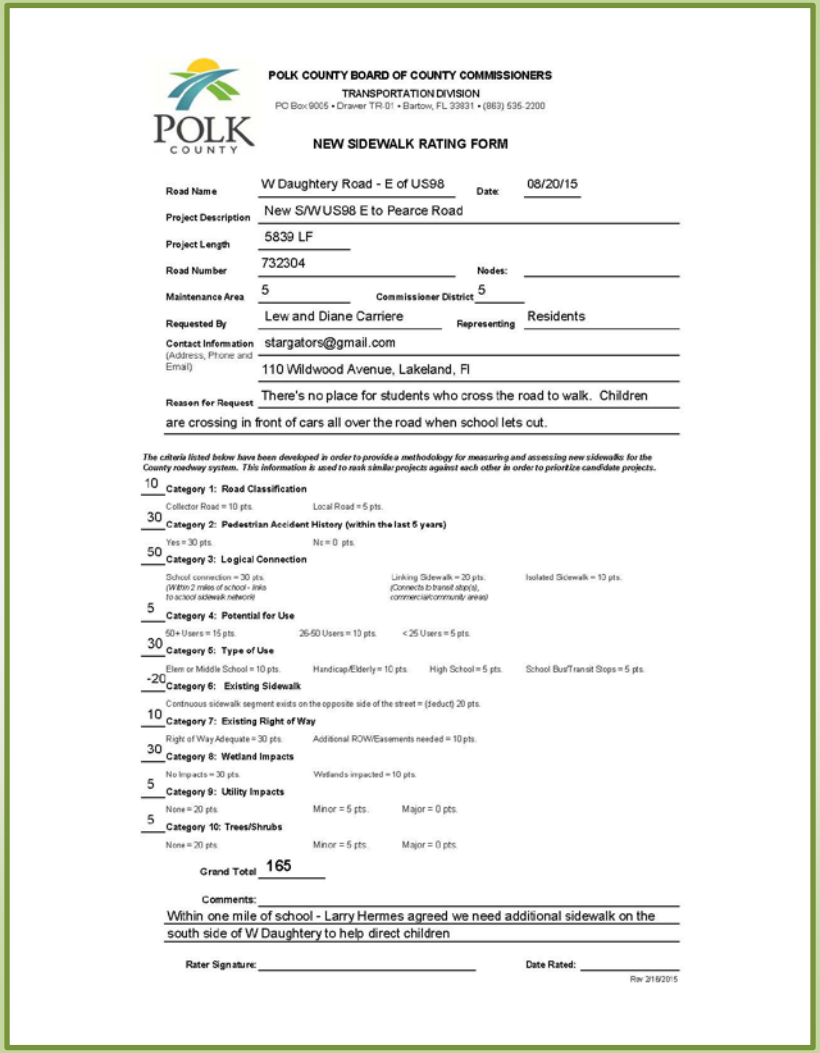

POLK COUNTY BOARD OF COUNTY COMMISSIONERS
TRANSPORTATION DIVISION
PO Box 9005 • Drawer TR-01 • Bartow, FL 33831 • (863) 535-2200

POLK COUNTY

NEW SIDEWALK RATING FORM

Road Name: W Daughtery Road - E of US98 Date: 08/20/15
Project Description: New S/W US98 E to Pearce Road
Project Length: 5839 LF
Road Number: 732304 Nodes:
Maintenance Area: 5 Commissioner District: 5
Requested By: Lew and Diane Carriere Representing: Residents
Contact Information (Address, Phone and Email): stargators@gmail.com
110 Wildwood Avenue, Lakeland, Fl
Reason for Request: There's no place for students who cross the road to walk. Children are crossing in front of cars all over the road when school lets cut.

*The criteria listed below have been developed in order to provide a methodology for measuring and assessing new sidewalks for the County roadway system. This information is used to rank similar projects against each other in order to prioritize candidate projects.*

10 **Category 1: Road Classification**
Collector Road = 10 pts. Local Road = 5 pts.

30 **Category 2: Pedestrian Accident History (within the last 5 years)**
Yes = 30 pts. No = 0 pts.

50 **Category 3: Logical Connection**
School connection = 30 pts. (Within 2 miles of school - links to school sidewalk network) Linking Sidewalk = 20 pts. (Connects to transit stop(s), commercial/community areas) Isolated Sidewalk = 10 pts.

5 **Category 4: Potential for Use**
50+ Users = 15 pts. 26-50 Users = 10 pts. < 25 Users = 5 pts.

30 **Category 5: Type of Use**
Elem or Middle School = 10 pts. Handicap/Elderly = 10 pts. High School = 5 pts. School Bus/Transit Stops = 5 pts.

-20 **Category 6: Existing Sidewalk**
Continuous sidewalk segment exists on the opposite side of the street = (deduct) 20 pts.

10 **Category 7: Existing Right of Way**
Right of Way Adequate = 30 pts. Additional ROW/Easements needed = 10 pts.

30 **Category 8: Wetland Impacts**
No Impacts = 30 pts. Wetlands impacted = 10 pts.

5 **Category 9: Utility Impacts**
None = 20 pts. Minor = 5 pts. Major = 0 pts.

5 **Category 10: Trees/Shrubs**
None = 20 pts. Minor = 5 pts. Major = 0 pts.

Grand Total: 165

Comments:
Within one mile of school - Larry Hermes agreed we need additional sidewalk on the south side of W Daughtery to help direct children

Rater Signature: _____ Date Rated: _____

Rev 2/16/2015

# West Daughtery Road (East of US 98)

**Total Score:** 165
**Limits:** US 98N east to N. Daughtery Road
**Length:** 5,839 LF (MOL)
**Requester:** Private Citizens

**Comments:**

- No receiving sidewalk for Padgett Elem. students who cross the road
- Students are crossing in front of cars when school dismisses (afternoon bell)
- Within one mile of school
- Larry Hermes/PCSB agreed with need for new sidewalk on the south side of West Daughtery Road to help direct children

N Daughtery Rd
Odom Rd
El Dorado Ave
La Serena Ave
N Socrum Loop Rd
Flamingo Ave
Bluebird Ave
Wildwood Ave
El Dorado St
3,086 LF (MOL)
Lake Gibson Ln
E Daughtery Rd
E Daughtery Rd
McDonald's
Chase Bank
Harbor Dr
East Daughtery Road
Daughtery Road N. east to N. Socrum Loop Road on either side (Gibsonia)
POLK COUNTY

*West end looking east on south side road*

**East Daughtery Road**

*Looking east along south side of road*

**East Daughtery Road**

*Looking east on south side of road at N. Socrum Loop Road*

**East Daughtery Road**

*Looking west at intersection at N. Socrum Loop Road*

**East Daughtery Road**

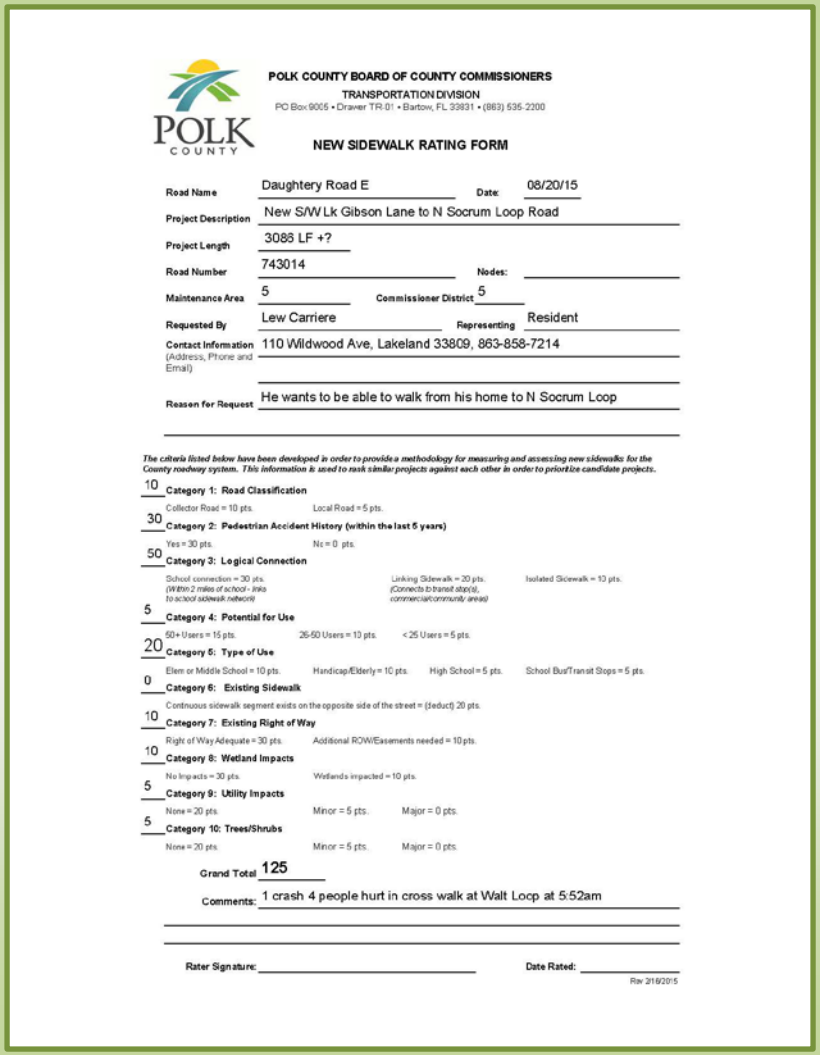

POLK COUNTY BOARD OF COUNTY COMMISSIONERS
TRANSPORTATION DIVISION
PO Box 9005 • Drawer TR-01 • Bartow, FL 33831 • (863) 535-2200

NEW SIDEWALK RATING FORM

Road Name: Daughtery Road E  Date: 08/20/15
Project Description: New S/W Lk Gibson Lane to N Socrum Loop Road
Project Length: 3088 LF +?
Road Number: 743014  Nodes:
Maintenance Area: 5  Commissioner District: 5
Requested By: Lew Carriere  Representing: Resident
Contact Information (Address, Phone and Email): 110 Wildwood Ave, Lakeland 33809, 863-858-7214
Reason for Request: He wants to be able to walk from his home to N Socrum Loop

*The criteria listed below have been developed in order to provide a methodology for measuring and assessing new sidewalks for the County roadway system. This information is used to rank similar projects against each other in order to prioritize candidate projects.*

10 **Category 1: Road Classification**
Collector Road = 10 pts. Local Road = 5 pts.

30 **Category 2: Pedestrian Accident History (within the last 5 years)**
Yes = 30 pts. No = 0 pts.

50 **Category 3: Logical Connection**
School connection = 30 pts. (Within 2 miles of school - links to school sidewalk network) Linking Sidewalk = 20 pts. (Connects to transit stop(s), commercial/community areas) Isolated Sidewalk = 10 pts.

5 **Category 4: Potential for Use**
50+ Users = 15 pts. 26-50 Users = 10 pts. < 25 Users = 5 pts.

20 **Category 5: Type of Use**
Elem or Middle School = 10 pts. Handicap/Elderly = 10 pts. High School = 5 pts. School Bus/Transit Stops = 5 pts.

0 **Category 6: Existing Sidewalk**
Continuous sidewalk segment exists on the opposite side of the street = (deduct) 20 pts.

10 **Category 7: Existing Right of Way**
Right of Way Adequate = 30 pts. Additional ROW/Easements needed = 10 pts.

10 **Category 8: Wetland Impacts**
No Impacts = 30 pts. Wetlands impacted = 10 pts.

5 **Category 9: Utility Impacts**
None = 20 pts. Minor = 5 pts. Major = 0 pts.

5 **Category 10: Trees/Shrubs**
None = 20 pts. Minor = 5 pts. Major = 0 pts.

Grand Total: 125
Comments: 1 crash 4 people hurt in cross walk at Walt Loop at 5:52am

Rater Signature:  Date Rated:

Rev 2/16/2015

# East Daughtery Road

**Total Score:** 125
**Limits:** N. Daughtery Road/Lake Gibson Lane east to N. Socrum Loop Road
**Length:** 3,086 LF (MOL)
**Requester:** Private Citizen

**Comments:**

- Requests pedestrian access to businesses at N. Socrum Loop Road
- One accident with four (4) people hurt in crosswalk at Walt Loop Road at 5:52 am on 9/28/12

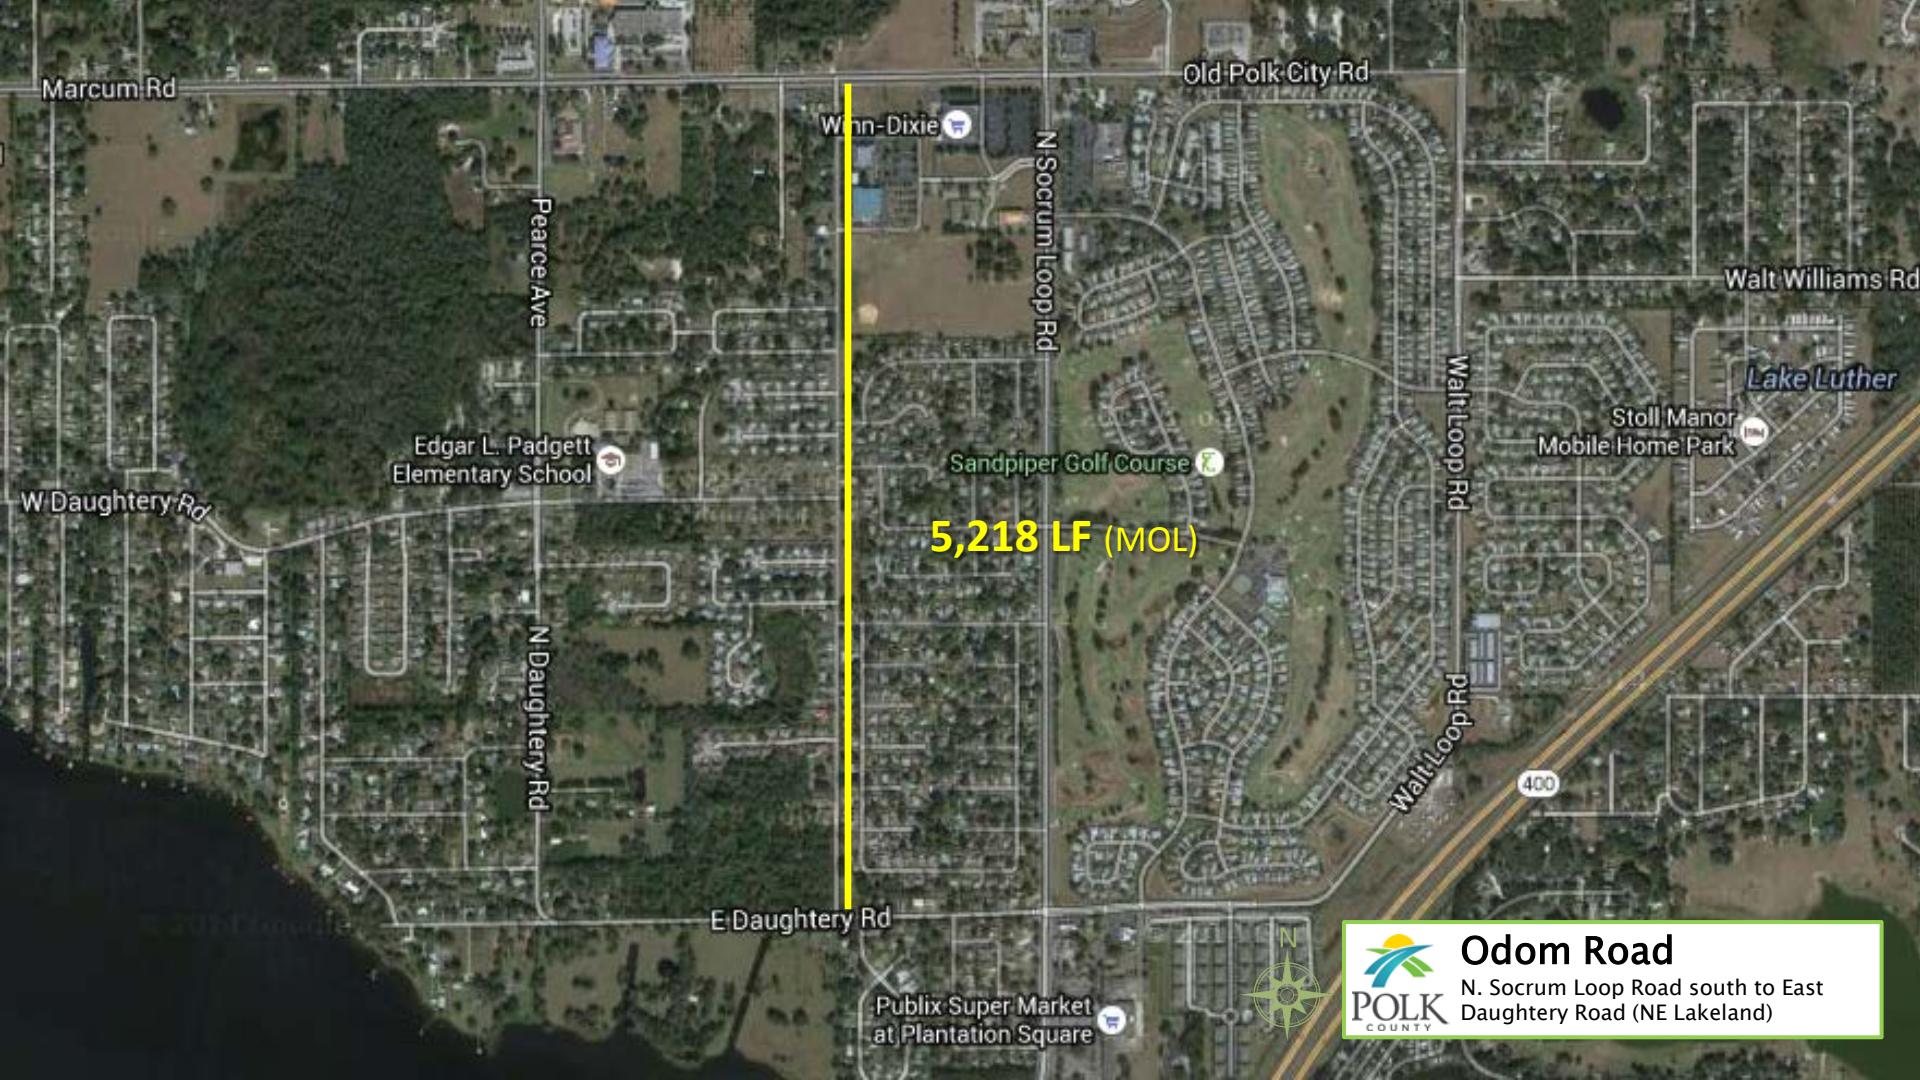
Marcum Rd
Old Polk City Rd
Winn-Dixie
N Socrum Loop Rd
Pearce Ave
Walt Williams Rd
Lake Luther
Stoll Manor Mobile Home Park
Walt Loop Rd
Edgar L. Padgett Elementary School
Sandpiper Golf Course
W Daughtery Rd
5,218 LF (MOL)
N Daughtery Rd
Walt Loop Rd
400
E Daughtery Rd
Publix Super Market at Plantation Square
N
POLK COUNTY
Odom Road
N. Socrum Loop Road south to East Daughtery Road (NE Lakeland)

# *Arial of Odom Road north to Church/School*

**Odom Road**

*At Padgett Place S. looking north*

**Odom Road**

*Mary Catherine Court looking south*

**Odom Road**

*Looking south form south of Mary Catherine Court*

**Odom Road**

*Looking south from last house on west side of Odom Road*

**Odom Road**

*Looking south from last house on east side of Odom Road*

**Odom Road**

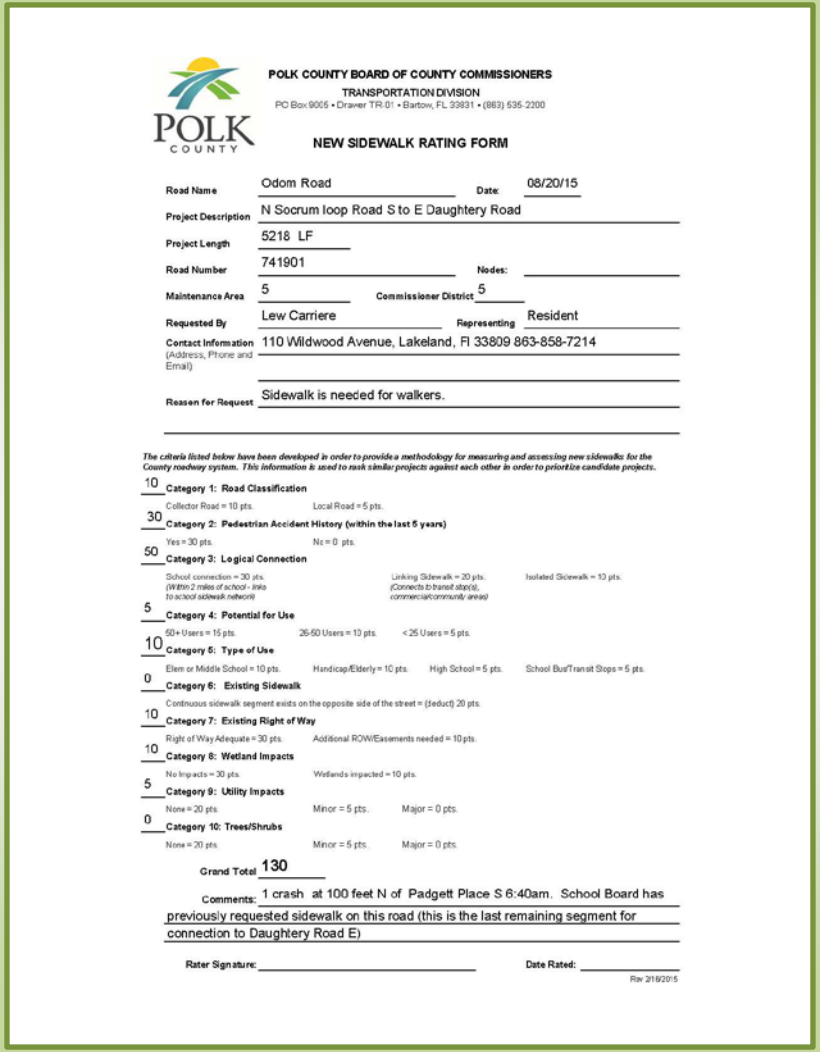

POLK COUNTY BOARD OF COUNTY COMMISSIONERS
TRANSPORTATION DIVISION
PO Box 9005 • Drawer TR 01 • Bartow, FL 33831 • (863) 535-2200

NEW SIDEWALK RATING FORM

Road Name: Odom Road  Date: 08/20/15
Project Description: N Socrum loop Road S to E Daughtery Road
Project Length: 5218 LF
Road Number: 741901  Nodes:
Maintenance Area: 5  Commissioner District: 5
Requested By: Lew Carriere  Representing: Resident
Contact Information (Address, Phone and Email): 110 Wildwood Avenue, Lakeland, Fl 33809 863-858-7214
Reason for Request: Sidewalk is needed for walkers.

*The criteria listed below have been developed in order to provide a methodology for measuring and assessing new sidewalks for the County roadway system. This information is used to rank similar projects against each other in order to prioritize candidate projects.*

10 **Category 1: Road Classification**
Collector Road = 10 pts. Local Road = 5 pts.

30 **Category 2: Pedestrian Accident History (within the last 5 years)**
Yes = 30 pts. No = 0 pts.

50 **Category 3: Logical Connection**
School connection = 30 pts. *(Within 2 miles of school - links to school sidewalk network)* Linking Sidewalk = 20 pts. *(Connects to transit stop(s), commercial/community areas)* Isolated Sidewalk = 10 pts.

5 **Category 4: Potential for Use**
50+ Users = 15 pts. 26-50 Users = 10 pts. < 25 Users = 5 pts.

10 **Category 5: Type of Use**
Elem or Middle School = 10 pts. Handicap/Elderly = 10 pts. High School = 5 pts. School Bus/Transit Stops = 5 pts.

0 **Category 6: Existing Sidewalk**
Continuous sidewalk segment exists on the opposite side of the street = (deduct) 20 pts.

10 **Category 7: Existing Right of Way**
Right of Way Adequate = 30 pts. Additional ROW/Easements needed = 10 pts.

10 **Category 8: Wetland Impacts**
No Impacts = 30 pts. Wetlands impacted = 10 pts.

5 **Category 9: Utility Impacts**
None = 20 pts. Minor = 5 pts. Major = 0 pts.

0 **Category 10: Trees/Shrubs**
None = 20 pts. Minor = 5 pts. Major = 0 pts.

Grand Total: 130

Comments: 1 crash at 100 feet N of Padgett Place S 6:40am. School Board has previously requested sidewalk on this road (this is the last remaining segment for connection to Daughtery Road E)

Rater Signature:  Date Rated:

Rev 2/18/2015

# Odom Road

**Total Score:** 130
**Limits:** N. Socrum Loop Road south to East Daughtery Road
**Length:** 5,218 LF (MOL)
**Requester:** Private Citizen

**Comments:**

- No existing sidewalk in a heavily residential area along an urban collector
- PCSB previously requested sidewalk
- One accident with three (3) pedestrian injuries 100 LF north of Padgett Place South at 6:40 am on 9/13/12

N Campbell Rd
D R Bryant Rd
D R Bryant Rd
Bingham's Branch
German Church
Cherry Hill Cir N
Cherry Hill Cir S
Cherry Hill Dr
Indian Ridge Way
N Campbell Rd
Harrison Rd
Wilt Engine Se
Help the Handicapped Inc
Tomoka Run
Tocoi Path
Indian Ridge Pl
M & B Electronics
2,628 LF (MOL)
Britt Rd
Britt Rd
Hamlet Cir
Woodvine Cir
Dyer Notary Service
Peak Ave
Adele Rd
Boots Rd
Harrison Pl Blvd
Hamlet Cir
Adele Rd
Harrison Rd
Dunhill Cir
Copper Ridge Blvd
Banana Rd
N
Berkford Cir
N Campbell Rd
Campbell Road North
Banana Road north to D.R. Bryant Road
(N. Lakeland)
POLK COUNTY

*Utility entrance looking south*

**Campbell Road North**

*Looking north on west side of Campbell Road North*

**Campbell Road North**

*Looking south at Indian Woods Trail*

**Campbell Road North**

*Looking south at Indian Woods Trail (Ditch)*

**Campbell Road North**

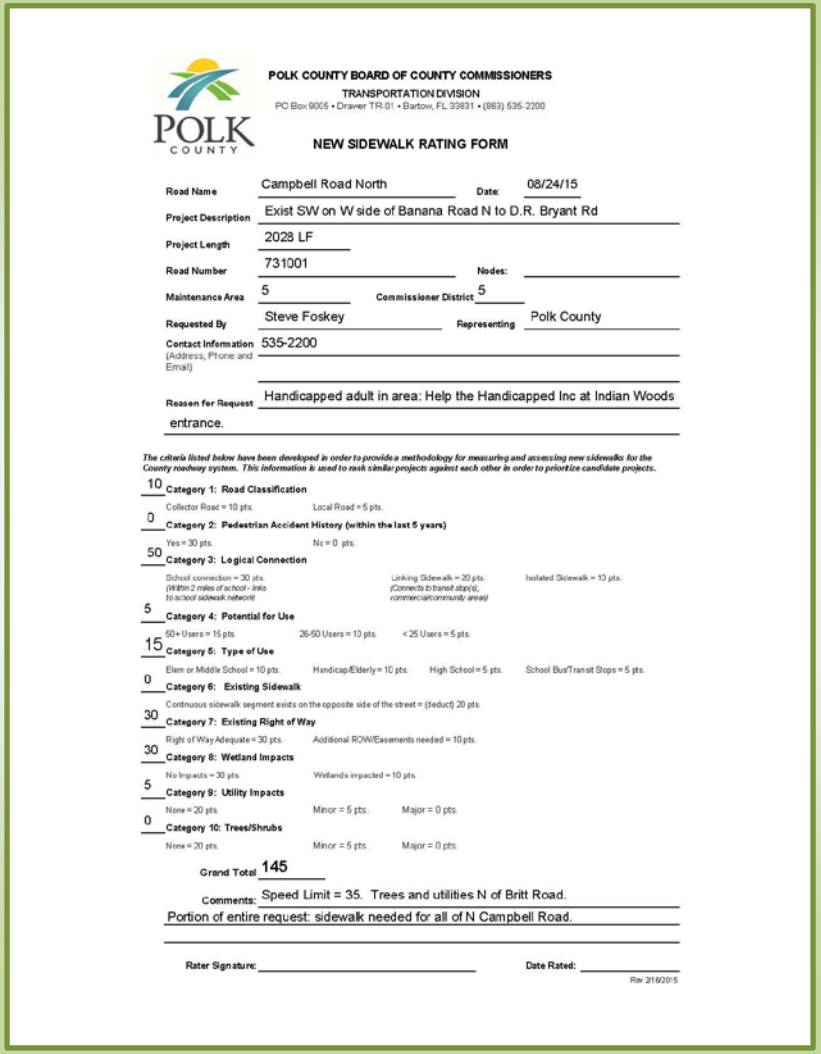

POLK COUNTY BOARD OF COUNTY COMMISSIONERS
TRANSPORTATION DIVISION
PO Box 9005 • Drawer TR-01 • Bartow, FL 33831 • (863) 535-2200

POLK COUNTY

NEW SIDEWALK RATING FORM

Road Name: Campbell Road North  Date: 08/24/15
Project Description: Exist SW on W side of Banana Road N to D.R. Bryant Rd
Project Length: 2028 LF
Road Number: 731001  Nodes:
Maintenance Area: 5  Commissioner District: 5
Requested By: Steve Foskey  Representing: Polk County
Contact Information (Address, Phone and Email): 535-2200
Reason for Request: Handicapped adult in area: Help the Handicapped Inc at Indian Woods entrance.

*The criteria listed below have been developed in order to provide a methodology for measuring and assessing new sidewalks for the County roadway system. This information is used to rank similar projects against each other in order to prioritize candidate projects.*

10 Category 1: Road Classification
Collector Road = 10 pts. Local Road = 5 pts.

0 Category 2: Pedestrian Accident History (within the last 5 years)
Yes = 30 pts. No = 0 pts.

50 Category 3: Logical Connection
School connection = 30 pts. (Within 2 miles of school - links to school sidewalk network) Linking Sidewalk = 20 pts. (Connects to transit stop(s), commercial/community areas) Isolated Sidewalk = 10 pts.

5 Category 4: Potential for Use
50+ Users = 15 pts. 26-50 Users = 10 pts. <25 Users = 5 pts.

15 Category 5: Type of Use
Elem or Middle School = 10 pts. Handicap/Elderly = 10 pts. High School = 5 pts. School Bus/Transit Stops = 5 pts.

0 Category 6: Existing Sidewalk
Continuous sidewalk segment exists on the opposite side of the street = (deduct) 20 pts.

30 Category 7: Existing Right of Way
Right of Way Adequate = 30 pts. Additional ROW/Easements needed = 10 pts.

30 Category 8: Wetland Impacts
No Impacts = 30 pts. Wetlands impacted = 10 pts.

5 Category 9: Utility Impacts
None = 20 pts. Minor = 5 pts. Major = 0 pts.

0 Category 10: Trees/Shrubs
None = 20 pts. Minor = 5 pts. Major = 0 pts.

Grand Total: 145

Comments: Speed Limit = 35. Trees and utilities N of Britt Road. Portion of entire request: sidewalk needed for all of N Campbell Road.

Rater Signature: _____ Date Rated: _____

Rev 2/16/2015

# North Campbell Road

**Total Score:** 145
**Limits:** Banana Road north to D.R. Bryant Road
**Length:** 2,028 LF (MOL)
**Requester:** Roadway Maintenance Section

**Comments:**

- Existing sidewalk on the west side of Banana Road north to D.R. Bryant Road
- Handicapped users in the area (Indian Woods)
- Speed Limit 35 MPH
- Trees and utilities north of Britt Road
- Portion of request (sidewalk is needed for entire length of N. Campbell Road)